


Desktop type quick drying oven

Fast Dry-250




External view

Front view

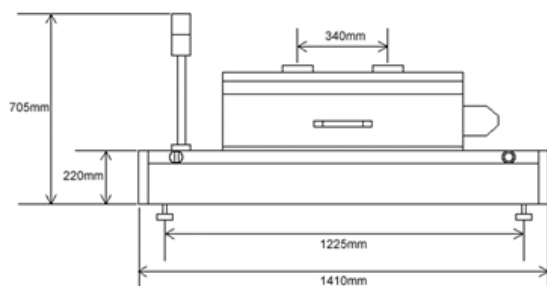

Top view

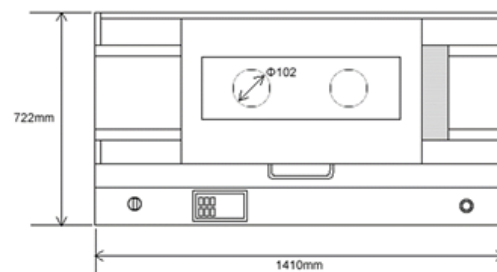

Basic specifications

| | |
|-----------------------|----------------------------|
| Conveyance method | mesh conveyance |
| Conveying direction | Selectable |
| Board effective width | 250mm |
| Part effective height | top surface 60mm |
| Conveying speed | 0.5m/min~2.0m/min |
| Number of zones | 3 heating zones |
| Heating method(※1) | Hot air circulation method |
| Preset temperature | 50°C~350°C |

(※1)The heating method is different from our other models.

| | |
|----------------------|-------------------------------------|
| Operation input | Touch panel method |
| Input Power | 3 φ 200V |
| Total capacity | 5.5kVA |
| Breaker capacity | 30A |
| Exhaust size | Type 3 grounding |
| Exhaust size | Φ 102 × 2 locations Natural exhaust |
| Equipment dimensions | L1,410mm × H705mm × D722mm |
| Weight | 165kg |

(※2)H705mm also includes a signal light

Contact information

ANTOM Co., Ltd.

893-1 Kawamukai-cho, Tsuzuki-ku, Yokohama, Kanagawa 224-0044

TEL : +81-45-476-3461 (Reception hours: Weekdays 8:30-17:30)

WEB : <https://antom.co.jp/en> Mail : eigyoun@antom.co.jp

*For inquiries, please contact [Sales Technology Department].