

ANTOM




HAS-1016

- Heating method that uses both upper hot air + far infrared rays and lower far infrared rays
- 1-zone preheating furnace with an ultra-compact length of 740 mm
- Pre-heat a work with a large heat capacity to eliminate insufficient heating
- Can be installed in front of large reflows and flow tanks

Antom Co., Ltd.

HAS-1016

External dimensional drawing

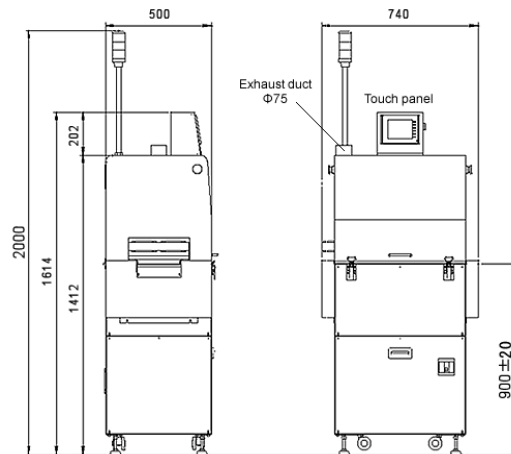

Basic specifications

Number of zones	1 heating zones
Heating method	Upper hot air + far infrared heating / lower far
Maximum set temperature	Upper 200 °C / Lower 200 °C
Effective board width	160mm
Transport method	mesh transfer
Transport speed	0.03~0.15m/min
Effective height of parts	Top surface 15mm
Supported language	Japanese / English
Path line	900 ± 20mm
Input power supply	AC200V 3 φ 5kVA 15A
Device dimensions	L740 × D500 × H1,412mm
Device weight	150kg

Option

Signal light	Circulation fan stop detection	
Entrance board clogging sensor	Hood interlock	
Exit board clogging sensor	Emergency stop button position change	
Entrance tact timer	Various reflow checkers	
Interface	cooling conveyors and transfer conveyors	
Overheat prevention device	Change paint color	
Memory card (100 types of storage)		
Doorway conveyor extension		

※We accept consultations on various customizations other than the above specifications.

Please feel free to contact us for price, delivery date, profile measurement, actual machine tour, demonstration
Antom Co., Ltd. 893-1 Kawamukai-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa 224-0044

TEL : +81-45-476-3461

WEB : <https://antom.co.jp>