

# ANTOM




# HAS-3016

- Heating method that uses both upper hot air + far infrared rays and lower far infrared rays
- Ultra-compact type heating furnace with a total length of 1 m and a heating 3-zone configuration
- Ideal for environments with limited installation space such as laboratories
- Supports a wide range of applications from drying and curing, trial production to research and development

**Antom Co., Ltd.**

# HAS-3016

## External dimensional drawing

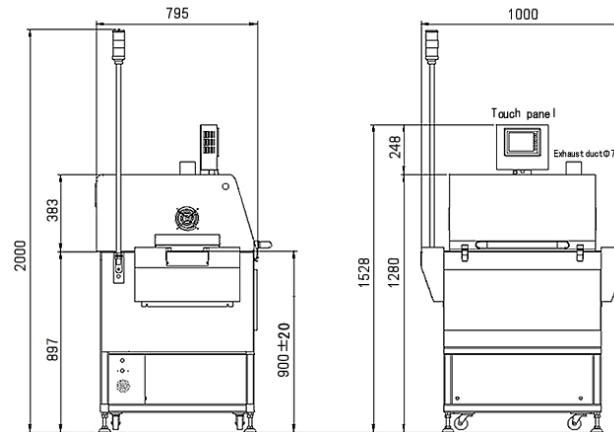

## Basic specifications

Number of zones	3 heating zones
Heating method	Upper hot air + far infrared heating / lower far infrared heating
Maximum set temperature	Upper 320 °C / Lower 350 °C
Effective board width	160mm
Transport method	mesh transfer
Transport speed	0.03~0.15m/min
Effective height of parts	Top surface 15mm
Supported language	Japanese / English
Path line	900 ± 20mm
Input power supply	AC200V 3 φ 8kVA 23A
Device dimensions	L1,000 × D795 × H1,280mm
Device weight	110kg

## Option

Signal light	Board drop sensor	
Entrance board clogging sensor	Memory card (100 types of storage)	
Exit board clogging sensor	Circulation fan stop detection	
Entrance tact timer	Hood interlock	
Interface	Emergency stop button position change	
Pin chain transfer method	Various reflow checkers	
Overheat prevention device	cooling conveyors and transfer conveyors	
Uninterruptible power system	Change paint color	

※We accept consultations on various customizations other than the above specifications.

Please feel free to contact us for price, delivery date, profile measurement, actual machine tour, demonstration  
Antom Co., Ltd. 893-1 Kawamukai-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa 224-0044

TEL : +81-45-476-3461

WEB : <https://antom.co.jp>